


DS CLASS V3

Solar collector


Tinox selective solar collector
High performance

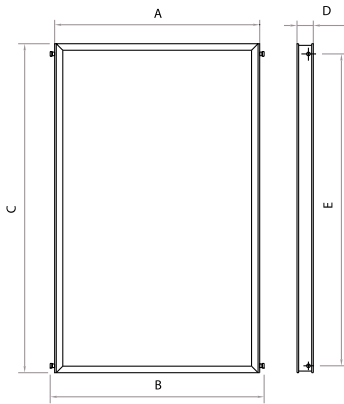


	DS-CLASS V3
A	1,218
B	1,272
C	1,988
D	90
E	1,912



Bend of the instant efficiency

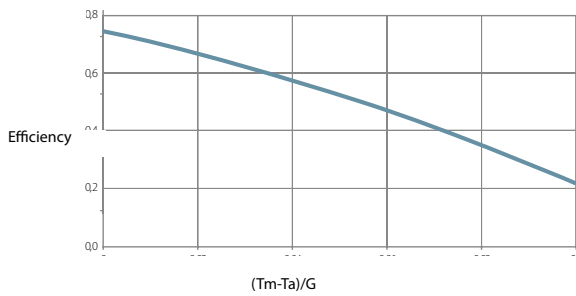

Hydraulic head bend

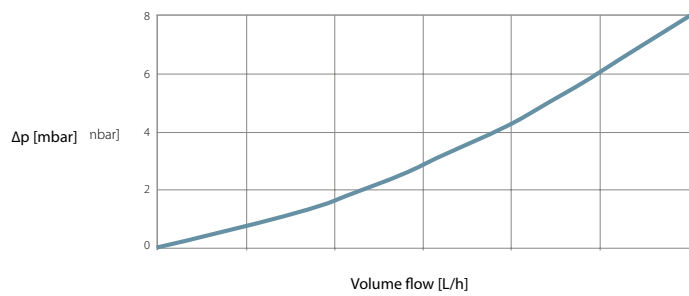

Model	Gross area m ²	Aperture area m ²	Absorption area m ²	Weight (empty) kg	Vol. collector L	Maximum pressure bar	Absorption α	Emissivity e	Transmissivity of glass	Stagnation temperature °C	Recommended flow L/h m ²
DS Class V3	2.07	1.92	1.89	37	1.10	10	95%	3%	91%	203 °C	55.5

Brackets

Options

Sensor housing

5 L anti-freezing liquid (100% concentration)